



OUTLINE DIMENSIONS & FOOTPRINT DETAILS

MECHANICAL DIMENSIONS

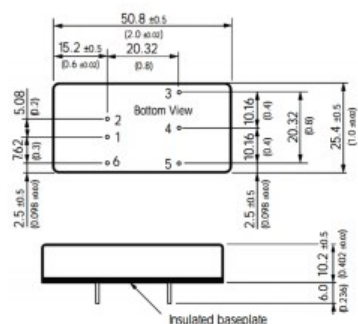

Note:
Unit:mm[inch]
Pin section tolerances:±0.10mm[±0.004inch]
General tolerances:±0.25mm[±0.010inch]

RECOMMENDED FOOTPRINT

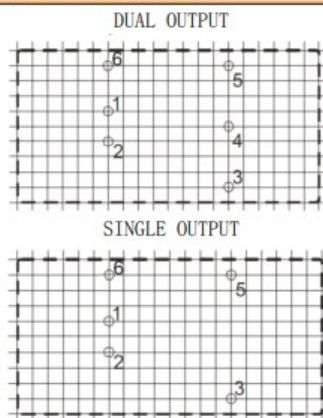

RECOMMENDED FOOTPRINT
Top view, grid:2.54mm(0.1inch)
diameter:1.00mm(0.039inch)

FOOTPRINT DETAILS

Pin	Single	Dual
1	GND	GND
2	Vin	Vin
3	+Vo	+Vo
4	NC	COM
5	0V	-Vo
6*	CTRL*	CTRL*


NC:No connection
*CTRL:CTRL pin can be added according to customers' need

When the environment temperature is higher than 71℃, the product output power should be less than 60% of the rated power.

No parallel connection or plug and play.

Use dual output simultaneously,forbid pening output pin (0V) to use as single output.

TUBE OUTLINE DIMENSIONS

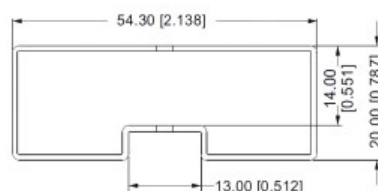

Note:
Unit :mm[inch]
General tolerances:±0.50mm[±0.020inch]
L=230mm[9.055inch] Tube Quantity: 7pcs