



FEATURES

- ◆ Wide (4:1) Input Range
- ◆ 30 Watt
- ◆ 1500VDC DC I/O Isolation
- ◆ Operating Temperature: -40°C ~ +85°C
- ◆ 2" x 1" Metal Case
- ◆ Regulated Output
- ◆ Single, Dual and Triple Output
- ◆ Metal shielding package
- ◆ Continuous Short Circuit Prot.
- ◆ MTBF > 1000K hours

MODEL SELECTION

WRB^①24^②05^③Z^④MDQ^⑤-30W(6000)^⑥

- ① Product Series
- ② Input Voltage
- ③ Output Voltage
- ④ Wide (4:1) Input Range
- ⑤ Package Style
- ⑥ Rated Power (Output current)

APPLICATIONS

The WRA-ZMDQ-30W & WRB-ZMDQ-30W series is a family of cost effective 30W, single and dual output DC-DC converters with an ultra wide input range of 4:1. These converters are encapsulated in nickel coated brass 2"x1" case with high performance features: 1500VDC input/output isolation voltage, continuous short circuit protection with automatic restart and tight line/load regulation, over current protection, over voltage protection, over temperature protection, high efficiency operation and soft start.



CE REACH
MICRODC RESERVES THE COPYRIGHT

SELECTION GUIDE

Order	Input Voltage (VDC)	Input Current No Load (mA)	Input Current Full Load (mA)	Output Voltage (VDC)	Output Current Full Load (mA)	Efficiency (%)	Capacitor Load (uF) ²
WRB2403ZMD-7500	9-36	60	1185	3.3	7500	89	20000
WRB2405ZMDQ-30W	9-36	100	1420	5	6000	91	14000
WRB2412ZMDQ-30W	9-36	30	1436	12	2500	90	2000
WRB2415ZMDQ-30W	9-36	30	1420	15	2000	91	2000
WRB4803ZMD-7500	18-72	50	593	3.3	7500	89	20000
WRB4805ZMDQ-30W	18-72	60	702	5	6000	91	14000
WRB4812ZMDQ-30W	18-72	30	718	12	2500	90	2000
WRB4815ZMDQ-30W	18-72	30	710	15	2000	90	2000

Input Specifications

Voltage Range	4:1 Ultra Wide Input (see table)
Input Filter	PI Type
Input Reflected Ripple Current ¹	20 mA pk-pk
Start up Time (Nom. Vin and constant resistive load)	30mS, typ.

Output Specifications

Voltage Accuracy	± 1% (main out)
Voltage Adjustability (only Single Output)	± 10%, max.
Short Circuit Protection	Indefinite (hiccup, automatic recovery)
Over Load Protection	150% of FL, typ.
Line Regulation	± 0.5% (single&dual) ± 1%
Load Regulation (0% - 100%)	± 0.5% (single) ± 1% / ± 5% (dual main / aux)
Cross Regulation ³	± 5% (dual)
Ripple&Noise (20Mhz bandwidth / 1.0uF - pk-pk)	100 mV (single&dual) 50
Temperature Coefficient	± 0.02% / °C
Transient Recovery Time ⁴	250us, typ.
Transient Response Deviation ⁴	± 3%, max.

General Specifications

I/O Isolation Voltage (3 sec.)	1500 VDC
I/O Isolation Capacitance	1500 pF, typ.
I/O Isolation Resistance	1000 M Ohm, min.
Switching Frequency	330 kHz, typ.
Humidity	95% rel H
Reliability Calculated MTBF (MIL-HDBK-217F)	> 435 khrs (single&dual out)

Physical Specifications


Case Material	Nickel Coated Copper
Potting / Base Material	Epoxy / Plastic (UL94V-0 rated)
Weight	~ 31g, typ.

Environment Specifications

Operating Temperature	-40 to +50°C (for 100% - ambient)
Maximum Case Temperature	105°C
Storage Temperature	-40 to +125°C
Cooling	Free Air Convection (10mm distance required)
RoHS Conform	Soldering 260°C, max. (1.5mm from case 10s.)

OUTLINE DIMENSIONS & FOOTPRINT DETAILS

Mechanical Dimensions

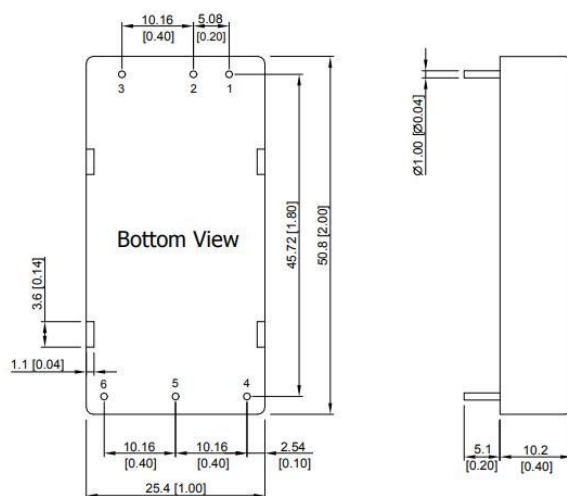


Pin Connections


Pin	Function
1	+Vin
2	-Vin
3	Remote On/Off
4	+Vout
5	-Vout
6	Trim

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: $X.X \pm 0.25$ ($X.XX \pm 0.01$)
 $X.XX \pm 0.13$ ($X.XXX \pm 0.005$)
- ▶ Pin diameter $\varnothing 1.0 \pm 0.05$ (0.04 ± 0.002)

TEMPERATURE DERATING GRAPH

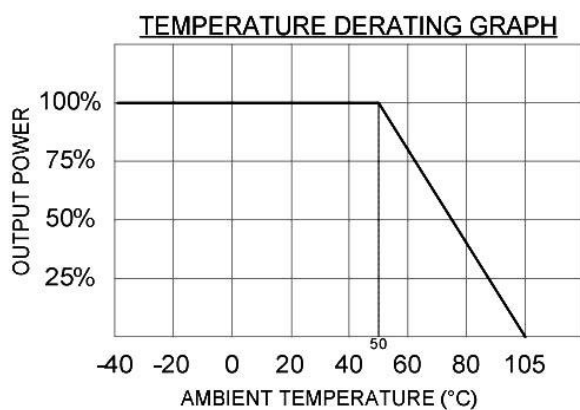


TUBE OUTLINE DIMENSIONS

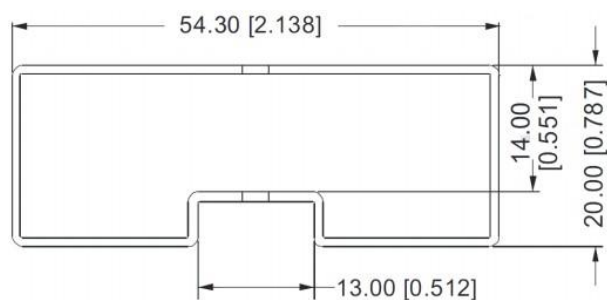

Unit :mm[inch]
 General tolerances: $\pm 0.50\text{mm} [\pm 0.020\text{inch}]$
 L=230mm[9.055inch] Tube Quantity: 7pcs

EMI Filter

Input filter components (C1, C3, L) are used to help meet conducted emissions requirement. These components should be mounted as close as possible to the module; all leads should be minimized to decrease radiated noise.

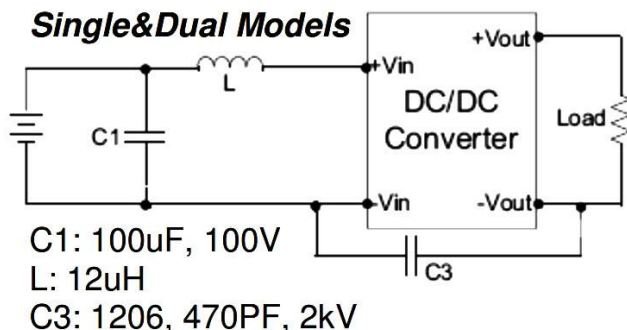

EMC SPECIFICATIONS


Radiated Emissions	EN 55022	CLASS A
Conducted Emissions ⁵	EN 55022	CLASS A
ESD	EN 61000-4-2	Perf. Criteria A
RS	EN 61000-4-3	Perf. Criteria A
EFT ⁶	EN 61000-4-4	Perf. Criteria A
Surge ⁶	EN 61000-4-5	Perf. Criteria A
CS	EN 61000-4-6	Perf. Criteria A
PFMF	EN 61000-4-8	Perf. Criteria A

Over Voltage Protection(Zender diode clamp)

3.3 Vout:	3.9 V
5 Vout	6.2 V
5.1 Vout	6.2 V
12 Vout	15 V
15 Vout	18 V
± 5 Vout	± 6.2 V
± 12 Vout	± 15 V
± 15 Vout	± 18 V

External Output Trimming

Output can be externally trimmed.
(Single output models only!)

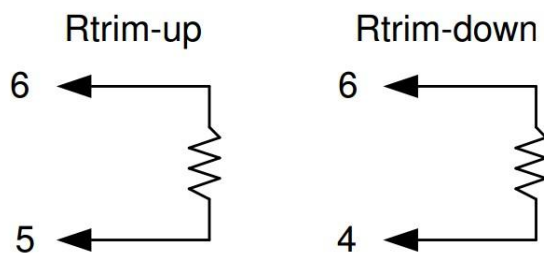

Under Input Voltage Lockout (typ.)

24 Vin Models	Module ON/OFF 8.6V / 7.9V
48 Vin Models	Module ON/OFF 17.8V / 16V

Remote ON/OFF Control⁷

ON:	3 -12 VDC or open circuit
OFF:	0 - 1.2 VDC or short circuit PIN2 and PIN3
OFF idle current:	5mA, typ.

1 = Measured Input reflected ripple current with a simulated source inductance of 12uH.

2 = Tested by minimal Vin and constant resistive load.

3 = Dual: One load is 25% to 100% load, the other load is 100% load, the output voltage variable rate is within ±5%.

4 = Tested by nominal Vin and 25% load step change (75% - 50% - 25% of Io)

5 = The WRA-ZMDQ-30W&WRB-ZMDQ-30W series can meet EN55022 Class A With an external filter in parallel with the input pins.

6 = An external filter capacitor is required if the module has to meet EN61000-4-4 and EN61000-4-5