

MBB SERIES
PB6FG—XXXE2:1 1KV ISOLATED 1 W REGULATED SINGLE OUTPUT DIP16

Available Inputs: 9 – 18 VDC Wide Input, 18 – 36 VDC Wide Input

Available Outputs: 3.3, 5 and 12 VDC for 9 - 18 VDC Input

Available Outputs: 5, 12 and 15 VDC for 18 - 36 VDC Input

Other specifications please enquire.

Electrical Specifications

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

Input Specifications

Voltage range 12 VDC, 9~18 VDC, 24 VDC, 18~36 VDC
Filter Pi Filter

Isolation Specifications

Rated voltage 1000 VDC
Resistance 1000 MOhm
Capacitance 80 pF typ.

Output Specifications

Voltage accuracy +/- 1 %, max.
Ripple and noise (at 20 MHz BW) 75 mV p-p, typ.
Short circuit protection Continuous and Auto - Restart
Line voltage regulation +/- 0,5 % max.
Load voltage regulation +/- 0,5 % max.
Temperature coefficient +/- 0,02 % / °C

General Specifications

Efficiency 72 % to 75 %
Switching frequency 150 KHz, typ.

Environmental Specifications

Operating temperature (ambient) - 25° C to + 71° C
Storage temperature - 55 °C to + 125 °C
Derating See graph


Physical Characteristics

Case material Non conductive black plastic


Examples of Partnumbers/Modelcode

PART NO.	INPUT VOLTAGE (VDC)	INPUT CURRENT FULL LOAD Typ.	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
PB6FG-123R3E2:1	9 - 18	115	3.3	300	72
PB6FG-1205E2:1	9 - 18	114	5	200	73
PB6FG-1212E2:1	9 - 18	135	12	100	74
PB6FG-2405E2:1	18 - 36	57	5	200	73
PB6FG-2412E2:1	18 - 36	68	12	100	73
PB6FG-2415E2:1	18 - 36	67	15	80	75

Dimensions

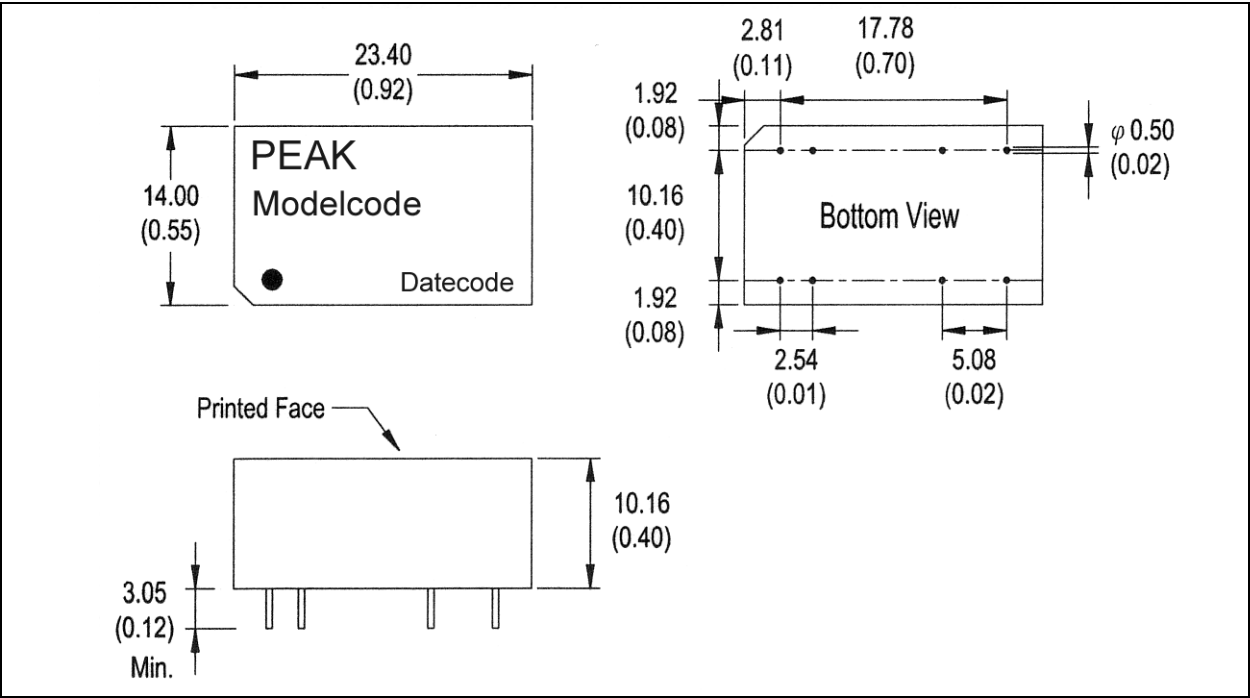

Derating Graph and Pinning

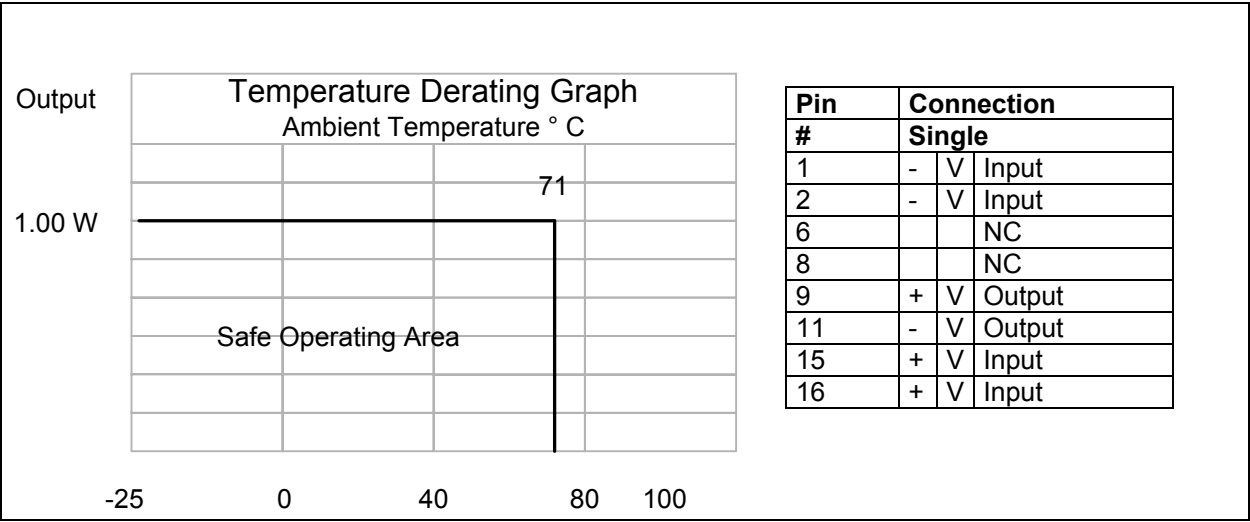

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn